

**PHOTOS ARE FOR REFERENCE ONLY
QUICK INSTALLATION GUIDE**

***NOTE:** Each monitor model may be different. This is an example to assist the installation of a flat panel monitor into a customer supplied chassis.*

1. REMOVE CRT, BOARD ASSEMBLIES AND HARNESS FROM THE ORIGINAL MONITOR:

- Unplug CRT monitor from power.
- Unscrew board assemblies and CRT from chassis.
- Keep the screws from CRT mounting.



Side View (CRT Monitor)




Front View (CRT Monitor)



Rear View (CRT Monitor)

RETAIN CHASSIS TO MOUNT NEW FLAT PANEL

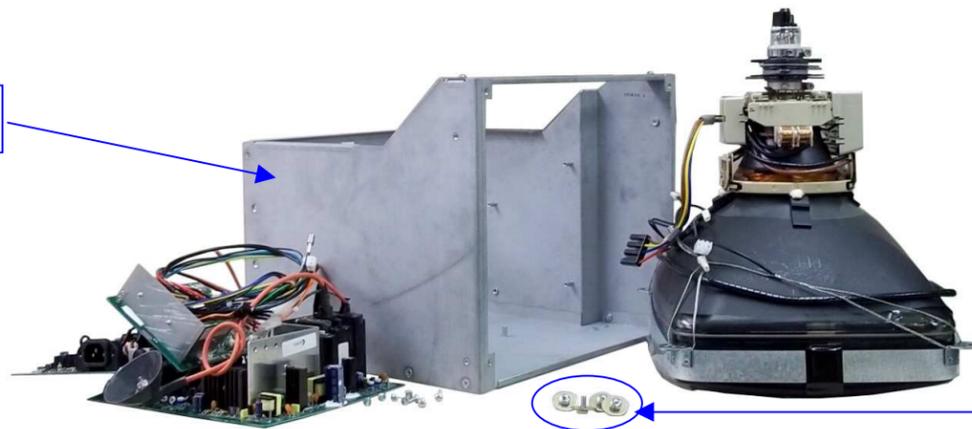

CRT, Board Assembly's and Harnesses removed from Chassis.

RETAIN SCREWS TO MOUNT NEW FLAT PANEL MONITOR

2. INSTALL THE NEW FLAT PANEL MONITOR INTO THE ORIGINAL CHASSIS.



View (New Flat Panel Monitor and Power Supply)



Back View (New Flat Panel Monitor)

SCREW (4 PLACES)



Mount Flat Panel Monitor to Chassis using screws from CRT mounting.



Rear View (Flat Panel Monitor) in Chassis

(POWER PLUG)



Plug Power Supply into Flat Panel Monitor.